


AUTOMATIC TRANSFER SWITCH (ATS)

Manual Changeover Switch

W2

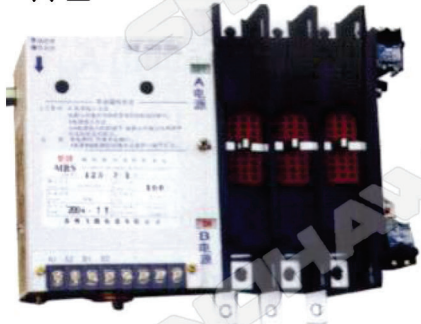

WN3



แบบตาม Handle	ON-ON	ON-OFF-ON
Rated current	W2 - 3P (ราคา)	WN3 - 3P (ราคา)
100A	(AT009) 19,500	-
200A	(AT014) 26,200	-
500A	(AT010) 52,000	-
800A	-	(AT032) 153,500
1000A	-	(AT034) 192,700

(AT101) ตู้ควบคุม ATS W2 (ON-ON) มีคอนแทกสตาร์ท ราคา 12,000 บาท

รุ่น W2

Model				W-2					
Insulation voltage				AC690V					
Rated voltage				AC380V/400V (AC660V/690V DC 125V/250V)					
Rated current(Ie)				100A		200A		500A	
Kind of throw				Double throw					
Wiring method				Panel front					
Number of poles				3P		3P		3P	
Weight (kg)				5.5		8		14	
Operating current (A)	DC110V/125V			6		8		10	
	AC100V/110V			6		8		10	
	AC200V/220V/230V			3		4		5	
Performance	Short-time withstand current			10kA		15kA		20kA	
	Rated Conditional Short-circuit current			25kA		37.5kA		50kA	
	Switching capacity			AC-33B(10 le making/10 le breaking)cosØ =0.35 DC-33B 1.1 le making/1.1 le breaking L/R=1ms					
	Transfer time	Power A side	Making	55ms				60ms	
			Breaking	20ms				25ms	
		Power B side	Making	55ms				60ms	
			Breaking	20ms				25ms	
	Life			Electrical: 2000 Operations, Mechanical: 6000 Operations					
	Switching Frequency			120 Operations/hour					
Auxiliary switch				Both power A,B are 2 normally open and 2 normally closed; Switching capacity AC:100V/110V 5A AC200V/220V 2.5A DC:110V 0.5A					
accessories				Manual handle					