


หางปลากลมเปลือย

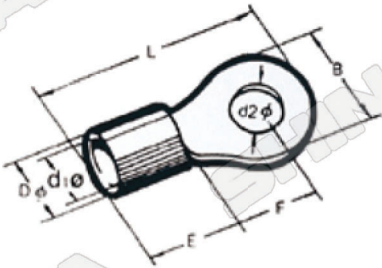

| หางปลากลมเปลือย |              |                       |          |
|-----------------|--------------|-----------------------|----------|
| เบอร์           | เข้าสายขนาด  | เข้าหลอดขนาด          | ราคา/บาท |
| R1.25           | 0.25-1.65    | -3, -3S, -3M, -4, -4M | 2.15-    |
|                 |              | -5                    | 2.34-    |
| R2              | 1.04-2.63    | -3M, -4, -4M          | 2.47-    |
|                 |              | -5                    | 2.60-    |
|                 |              | -6,                   | 3.38-    |
|                 |              | -8                    | 3.64-    |
|                 |              | -10                   | 4.81-    |
| R3.5            | 2.63-4.6     | -4 , -5               | 4.29-    |
|                 |              | -6                    | 5.46-    |
| R5.5            | 2.63-6.64    | -4 , -4S , -5         | 4.29-    |
|                 |              | -6                    | 5.92-    |
|                 |              | -8                    | 7.22-    |
|                 |              | -10                   | 7.61-    |
| R 8             | 6.64-10.52   | -6                    | 9.10-    |
|                 |              | -8 , -10              | 12.35-   |
| R 14            | 10.52-16.78  | -6                    | 19.50-   |
|                 |              | -8 , -10              | 19.50-   |
| R 22            | 16.78-26.66  | -8, -10,              | 27.30-   |
| R 38            | 26.66-42.42  | -8 , -10              | 40.00-   |
| R 60            | 42.42-60.57  | -8 , -10 , -12        | 48.10-   |
| R 70            | 60.57-76.28  | -10 , -12             | 71.50-   |
| R 80            | 76.28-96.3   | -10 , -12             | 76.70-   |
| R 100           | 96.3-117.2   | -10 , -12             | 104.00-  |
| R 150           | 117.2-152.05 | -10                   | 182.00-  |
| R 180           | 152.05-192.6 | -12                   | 260.00-  |

| ITEM NO. | WIRE RANGE |                 | D <sub>ø</sub> | d1 <sub>ø</sub> | E    | F     | B    | d2 <sub>ø</sub> | L    |
|----------|------------|-----------------|----------------|-----------------|------|-------|------|-----------------|------|
|          | AWG/MCM    | mm <sup>2</sup> |                |                 |      |       |      |                 |      |
| R1.25-3  | 22~16      | 0.25 ~ 1.65     | 3.2            | 1.7             | 4.5  | 4.0   | 5.5  | 3.7             | 11.5 |
| R1.25-3S |            |                 |                |                 |      | 4.0   | 5.5  | 3.2             | 11.5 |
| R1.25-4  |            |                 |                |                 |      | 7.0   | 8.0  | 4.3             | 15.8 |
| R1.25-5  |            |                 |                |                 |      | 7.0   | 8.1  | 5.3             | 15.8 |
| R1.25-6  |            |                 |                |                 |      | 11.0  | 11.6 | 6.7             | 21.7 |
| R1.25-8  |            |                 |                |                 |      | 22.0  | 11.6 | 8.4             | 21.7 |
| R2-3     | 16~14      | 1.04 ~ 2.63     | 3.9            | 2.3             | 4.8  | 7.75  | 8.5  | 3.2             | 16.8 |
| R2-3S    |            |                 |                |                 |      | 4.3   | 6.4  | 3.2             | 12.3 |
| R2-4     |            |                 |                |                 |      | 7.75  | 8.5  | 4.3             | 16.8 |
| R2-5     |            |                 |                |                 |      | 7.25  | 9.5  | 5.3             | 16.8 |
| R2-6     |            |                 |                |                 |      | 11.0  | 12.0 | 6.4             | 21.8 |
| R2-8     |            |                 |                |                 |      | 11.0  | 12.0 | 8.4             | 21.8 |
| R3.5-4   | 12~10      | 2.63 ~ 4.6      | 5.0            | 3.0             | 6.3  | 7.7   | 8.0  | 4.3             | 18.0 |
| R3.5-5   |            |                 |                |                 |      | 9.2   | 9.6  | 5.3             | 20.0 |
| R5.5-4   | 12~10      | 2.63 ~ 6.64     | 5.4            | 3.4             | 6.8  | 8.25  | 9.5  | 4.3             | 19.8 |
| R5.5-5   |            |                 |                |                 |      | 8.25  | 9.5  | 5.3             | 19.8 |
| R5.5-6   | 8          | 6.64 ~ 10.52    | 6.9            | 4.5             | 8.5  | 13.7  | 12.0 | 6.4             | 25.8 |
| R5.5-8   |            |                 |                |                 |      | 13.7  | 15.0 | 8.4             | 28.0 |
| R5.5-10  |            |                 |                |                 |      | 13.7  | 15.0 | 10.5            | 28.0 |
| R8-5     |            |                 |                |                 |      | 9.3   | 12.0 | 5.3             | 23.8 |
| R8-6     |            |                 |                |                 |      | 9.3   | 12.0 | 6.4             | 23.8 |
| R8-8     |            |                 |                |                 |      | 13.8  | 15.0 | 8.4             | 29.8 |
| R8-10    | 6          | 10.52 ~ 16.78   | 8.8            | 5.8             | 10   | 13.8  | 15.0 | 10.5            | 29.8 |
| R8-12    |            |                 |                |                 |      | 15.0  | 20.0 | 13.0            | 33.5 |
| R14-5    |            |                 |                |                 |      | 11.5  | 12.0 | 5.3             | 27.5 |
| R14-6    |            |                 |                |                 |      | 11.5  | 12.0 | 6.4             | 27.5 |
| R14-8    |            |                 |                |                 |      | 14.5  | 16.0 | 8.4             | 32.5 |
| R14-10   |            |                 |                |                 |      | 14.5  | 16.0 | 10.5            | 32.5 |
| R14-12   | 4          | 16.78 ~ 26.66   | 11.3           | 7.7             | 12   | 19.8  | 22.0 | 13.0            | 41.3 |
| R22-6    |            |                 |                |                 |      | 13.45 | 16.5 | 6.7             | 33.7 |
| R22-8    |            |                 |                |                 |      | 13.45 | 16.5 | 8.4             | 33.7 |
| R22-10   |            |                 |                |                 |      | 15.95 | 16.5 | 10.5            | 33.7 |
| R22-12   |            |                 |                |                 |      | 19.5  | 22.0 | 13.0            | 42.5 |
| R38-6    |            |                 |                |                 |      | 17.7  | 22.0 | 6.7             | 42.7 |
| R38-8    | 2          | 26.66 ~ 42.42   | 13             | 9.4             | 14   | 17.7  | 22.0 | 8.4             | 45.7 |
| R38-10   |            |                 |                |                 |      | 17.7  | 22.0 | 10.5            | 42.7 |
| R38-12   |            |                 |                |                 |      | 17.7  | 22.0 | 13.0            | 42.7 |
| R60-8    |            |                 |                |                 |      | 20.7  | 19.1 | 8.4             | 49.7 |
| R60-10   |            |                 |                |                 |      | 20.7  | 19.1 | 10.5            | 49.7 |
| R60-12   |            |                 |                |                 |      | 20.7  | 19.1 | 13.0            | 49.7 |
| R70-8    | 2/0        | 60.57 ~ 76.28   | 17.3           | 13.3            | 19   | 20.0  | 22.1 | 8.4             | 51.0 |
| R70-10   |            |                 |                |                 |      | 20.0  | 22.1 | 10.5            | 51.0 |
| R70-12   |            |                 |                |                 |      | 20.0  | 22.1 | 13.0            | 51.0 |
| R80-8    |            |                 |                |                 |      | 20.5  | 27.0 | 8.4             | 54.0 |
| R80-10   |            |                 |                |                 |      | 20.5  | 27.0 | 10.5            | 54.0 |
| R80-12   |            |                 |                |                 |      | 20.5  | 27.0 | 13.0            | 54.0 |
| R100-8   | 3/0        | 76.28 ~ 96.3    | 19.4           | 14.5            | 20   | 20.35 | 27.0 | 8.4             | 55.6 |
| R100-10  |            |                 |                |                 |      | 20.35 | 28.5 | 8.4             | 55.6 |
| R100-12  |            |                 |                |                 |      | 20.35 | 28.5 | 10.5            | 55.6 |
| R150-10  |            |                 |                |                 |      | 23.0  | 36.0 | 10.5            | 66.0 |
| R150-12  |            |                 |                |                 |      | 23.0  | 36.0 | 13.0            | 66.0 |
| R150-16  |            |                 |                |                 |      | 23.0  | 36.0 | 17.0            | 66.0 |
| R180-10  | 4/0        | 96.3 ~ 117.2    | 21.6           | 16.4            | 21   | 24.5  | 38.5 | 10.5            | 69.5 |
| R180-12  |            |                 |                |                 |      | 24.5  | 38.5 | 13.0            | 69.0 |
| R180-16  |            |                 |                |                 |      | 24.5  | 38.5 | 17.0            | 69.0 |
| R200-10  |            |                 |                |                 |      | 24.5  | 44.0 | 10.5            | 72.0 |
| R200-12  |            |                 |                |                 |      | 24.5  | 44.0 | 13.0            | 72.0 |
| R200-16  |            |                 |                |                 |      | 24.5  | 44.0 | 17.0            | 72.0 |
| R325-10  | 500~600    | 242.27 ~ 325    | 32             | 24              | 31.5 | 33.5  | 50.0 | 10.5            | 88.0 |
| R200-16  |            |                 |                |                 |      | 33.5  | 50.0 | 13.0            | 88.0 |
| R200-16  |            |                 |                |                 |      | 33.5  | 50.0 | 17.0            | 88.0 |
| R200-16  |            |                 |                |                 |      | 33.5  | 50.0 | 17.0            | 88.0 |