





APPLICATION SCOPE

C60C used in the line of AC, 50/60Hz, rated working voltage to 240v/415v and rated current to 63A as protection against overload and short-circuit of the circuit, especially suitable for lighting distribution system (C TYPE) and motor distribution system (D TYPE). They are the best alternative for the renewal of products.


SPECIFICATIONS

Rated working voltage (v)	240v / 415v
Rated working current In (A)	6A, 10A, 16A, 20A, 25A, 32A, 40A, 50A, 63A
Interrupting capacity	6KA
Tripping characteristic	C, D
Standard	Accords with IEC60898, GB10963

OPERATING CHARACTERISTICS

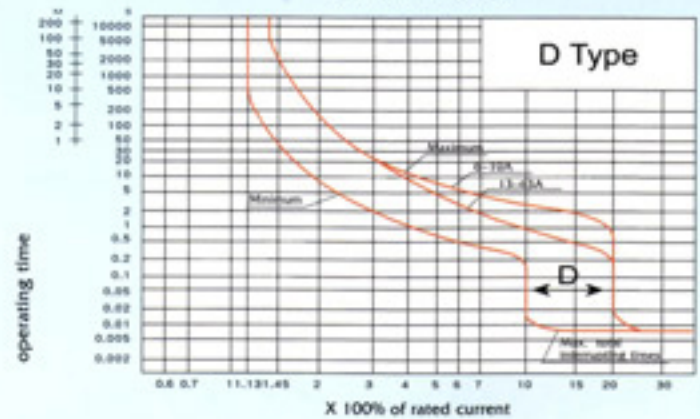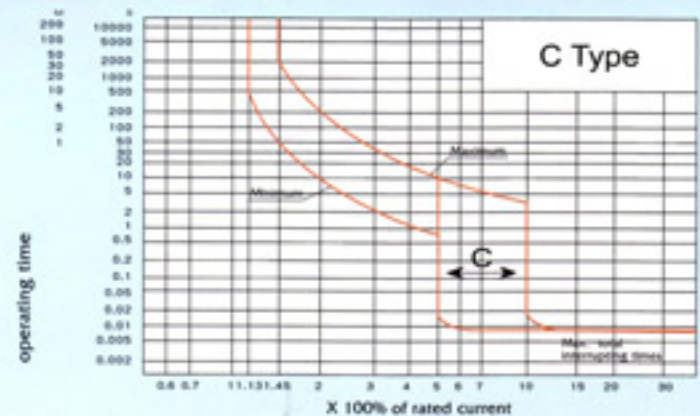

AMBIENT COMPENSATION

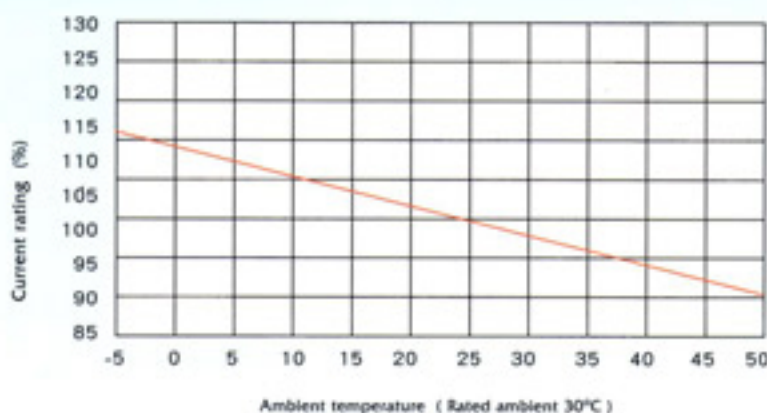

DIMENSIONS

