

■ FEATURES:

- Suitable for water supply and drainage.
- Plug in assembly, compact volume, easy for installation and replacement.
- Probes E1-E3 are live with low voltage (A.C. 8 volts).
- LED are provided to indicate operating condition.

■ SPECIFICATIONS:

- RATED VOLTAGE : 110 or 220V AC.
- CONTROL OUTPUT : 250V 5A AC.
- OPERATING VOLTAGE RANGE : 85 TO 110% OF RATED VOLTAGE

■ CONNECTIONS

General water-supply or drainage running


1. WATER SUPPLY

- Connect electromagnetic switch coil terminal MS to 6.
- The pump stops when water level reaches E1 and starts when water level drops below E2.

2. DRAINAGE

- Connect electromagnetic switch coil terminal MS to 5.
- Pump starts when water level reaches E1 and stops when water level drops below E2.

General Water-Supply Running

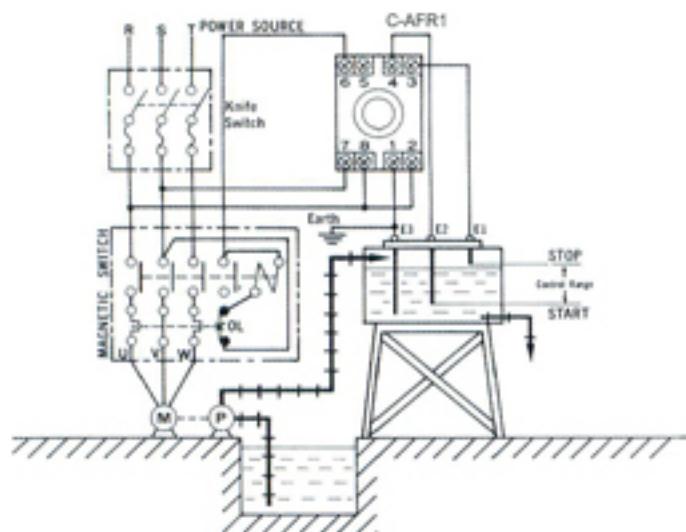

General drainage running

