


# SHINOHAWA

# RELAY

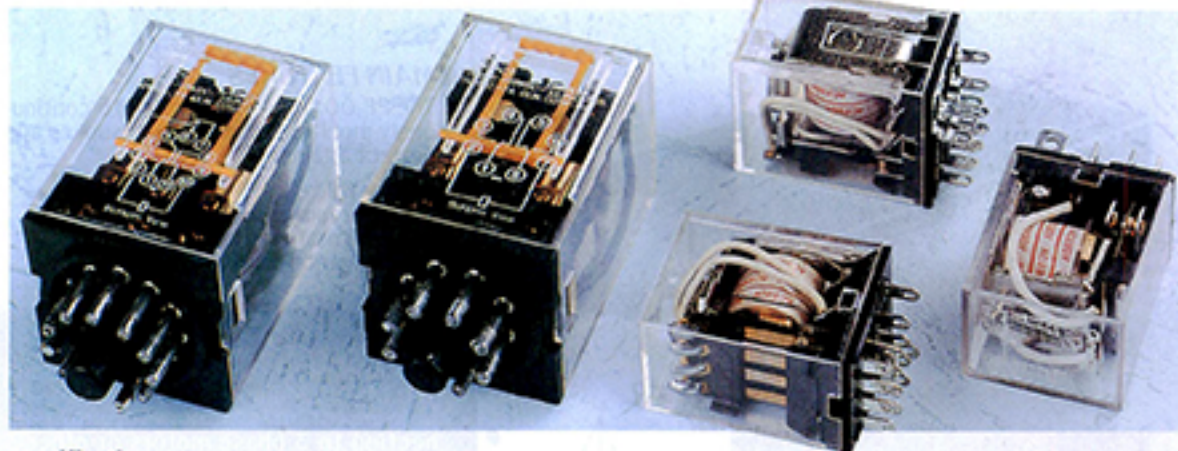

## specification

MODEL		MY SERIES			LY SERIES			MK SERIES	
		MY-2	MY-3	MY-4	LY-2	LY-3	LY-4	MK2P1	MK3P1
EXTERNAL DIMENSION (mm)	L	27.6			27.6	27.6	27.6	34.7	34.7
	W	31.5			31.5	31.5	31.5	52.1	52.1
	H	34			36	36	36	52.1	52.1
CONTACT FORM		2A2B	3A3B	4A4B	2A2B	3A3B	4A4B	2A2B	3A3B
CONTACT CAPACITY		28V DC 220V AC			28V DC 220V AC			28V DC 220V AC	
		5A		5A	15A/10A	10A		10A 5A	
COIL VOLTAGE	DC	6,12,24,36,110 V			6,12,24,36,48,110V			6,12,24,48,60,110,220V	
	AC	6,12,24,36,110,220V			6,12,24,36,48,110,220V			6,12,24,36,48,110,127,220,380V	
CONTACT RESISTANCE		$\leq 50m\Omega$			$\leq 50m\Omega$			$\leq 50m\Omega$	
INSULATION RESISTANCE		$\geq 1000M\Omega$			$\geq 1000M\Omega$			$\geq 500M\Omega$	
DIELECTRIC STRENGTH		1000V AC 50/60Hz			1500 AC 50/60 Hz			1500V AC 50/60Hz	
SERVICE LIFE	MECHANICAL	10,000,000			10,000,000			10,000,000	
	ELECTRICAL	100,000			100,000			100,000	
TERMINAL		OUTLET AND PRINTED-CIRCUIT BOARD			OUTLET AND PRINTED-CIRCUIT BOARD			OUTLET SOLDER	

