


SHINOHAWA

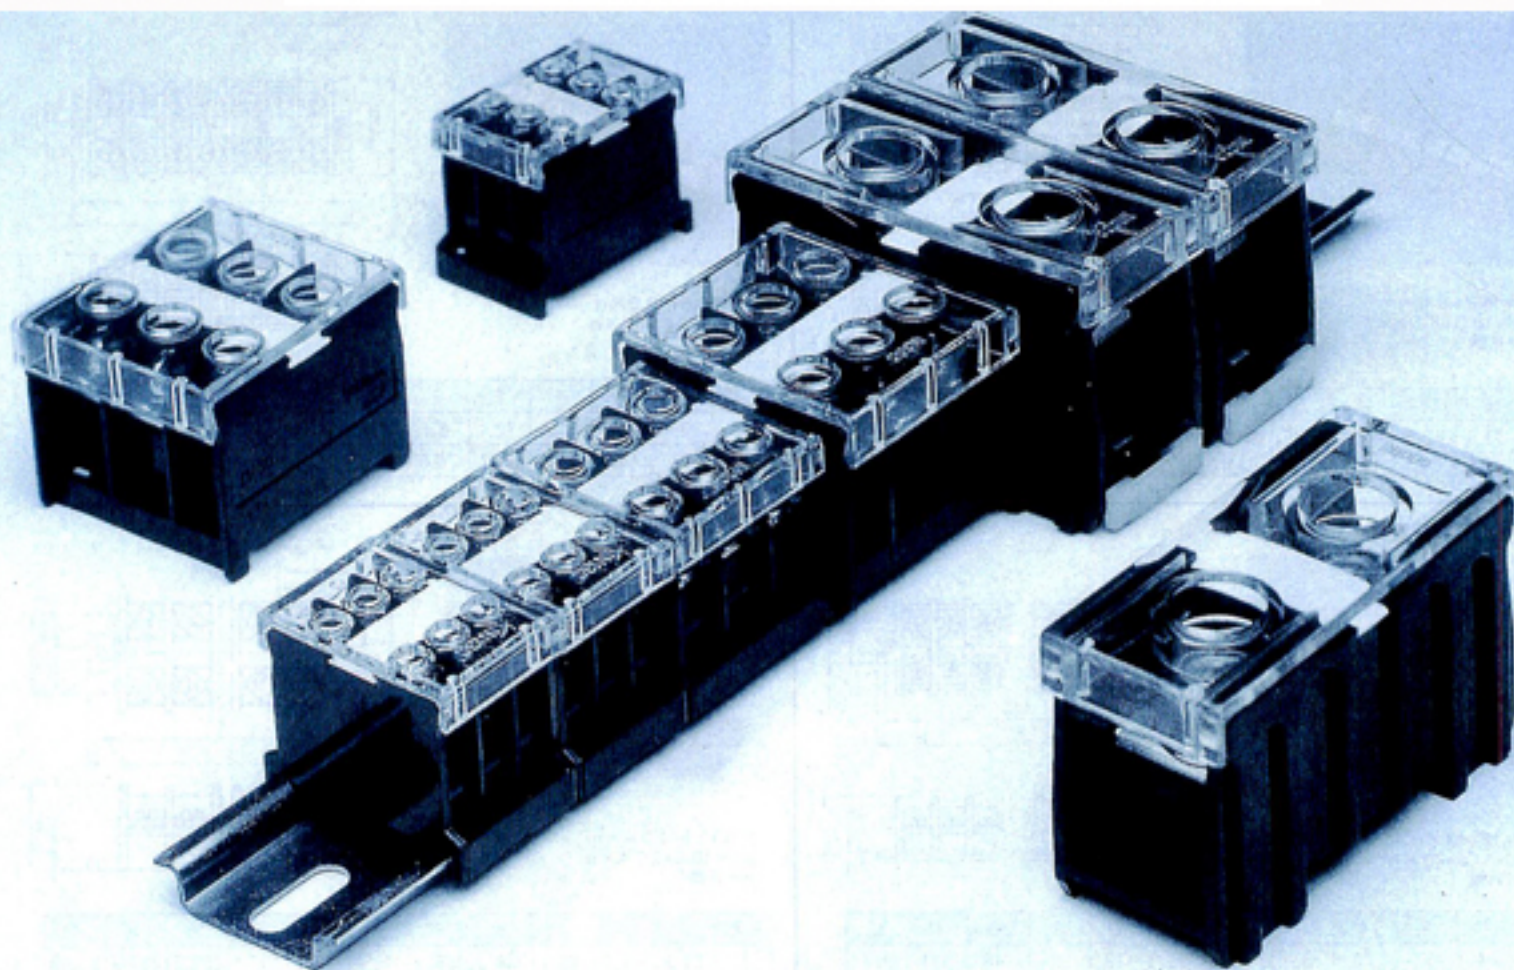

RAIL TYPE TERMINAL BLOCK IN SERIES

- THIS TERMINAL BLOCK CAN BE MOUNTED TO THE RAIL BY SINGLE FINGER OPERATION
- RATED VOLTAGE: 600V
- DIELECTRIC STRENGTH: 2500V, 1MIN
- INSULATION RESISTANCE: 100M Ω MIN

■ SPECIFICATIONS

UNIT: mm

Item No.	RATINGS	DIMENSIONS					PACK
		A	B	C	D	E	
IN12	2P 2mm ² max 20A	40	30	20	8	37	30 PCS
IN13	3P 2mm ² max 20A	40	30	25	6.7	37	20 PCS
IN20	3P 3.5mm ² max 30A	40	30	35	9.7	37	20 PCS
IN30	3P 8mm ² max 50A	45	34	43	12.2	48	10 PCS
IN411	1P 14mm ² max 60A	45	34	15.5	13.5	48	30 PCS
IN60	1P 22mm ² max 90A	56	38	22	17	56	10 PCS
IN100	1P 38mm ² max 130A	75	45	32	24	73.5	6 PCS
IN200	1P 100mm ² max 240A	86	57	39	31	86.5	3 PCS
IN400	1P 200mm ² max 370A	125	73	62	52.3	126	2 PCS

