


SELF-ADHESIVE TIE MOUNTS

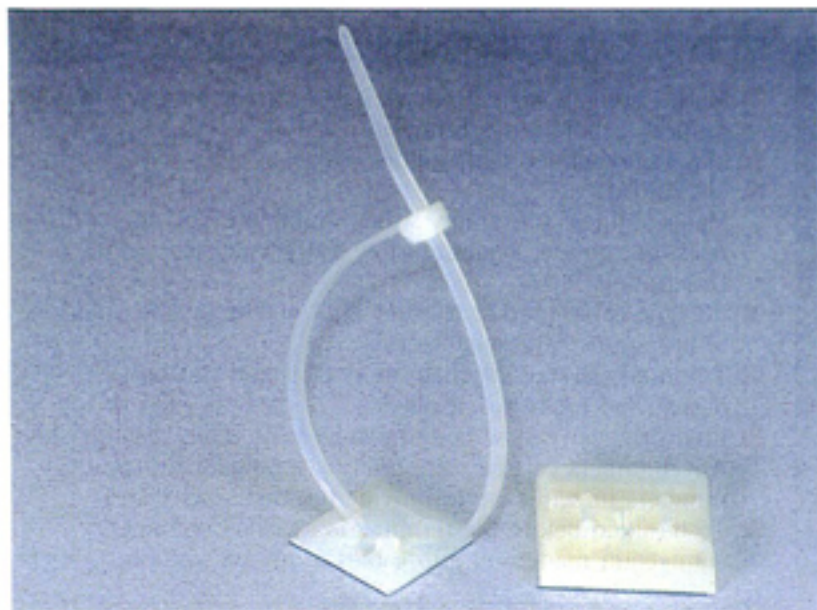


- Material: Constructed of nylon and backed with high quality self-adhesive tape.
- SELF-ADHESIVE TIE MOUNTS is designed to support light weight wire bundles when properly applied on any clean, smooth, grease-free surface. For heavy support, mounting hole is provided for screws.
- To apply, simply peel off backing paper and apply mount to surface. After that, cable ties can be inserted to secure wire bundles.
- To apply with nylon cable ties:
 - HA-101: SV-075, 094, 100, 120, 150, 165, 180
 - HA-102: SV-075, 094, 100, 120, 150, 165, 180, 200, 250, 280, 310, 385
 - HA-103: SV-075, 094, 100, 120, 150, 165, 180, 200, 250, 280, 310, 385
- Black color available

mm

ITEM NO.	L	W	H (WITHOUT TAPE)	MOUNTING HOLE	T	PACKING
HA-101	21	21	3.5	—	4.7	100pcs/bag
HA-102	28	28	4	5.0	5.0	
HA-103	28	28	4	5.0	5.0	

Backed with adhesive tape

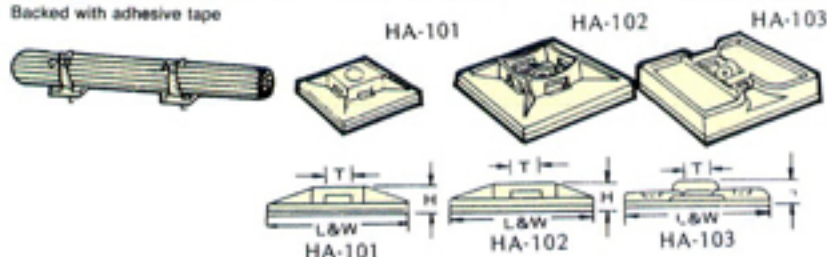

VINYL TUBES

mm



- Material: Soft P.V.C.
- Maximum service temp: 80°C
- For the insulation works of wire end terminal. Performing the work with a simple one-touch to tighten and seal against dirt, moisture and water.
- Standard color: Red, white, green, blue, yellow, black.

ITEM NO.	WIRE SUITABLE	D1	D2	D3	L1	L2	T	PKG.
P-1.25	600V 1.25mm ² , 1.25mm ² Single	2.8	3.3	3.1	6	7	0.6	100pcs
P-2	600V 2.0mm ² , 2.0mm ² , 1.2mm ² , Single, 1.6mm ² Single	3.3	4.5	3.7	7	7	0.7	
P-3.5	600V 3.5mm ²	4.8	5.7	4.1	9	8	0.8	
P-5.5	600V 5.5mm ² , 2.6mm ² Single	4.8	5.7	5.2	9	8	0.8	
P-8	600V 5.5mm 3.2mm ² Single	6.2	7.2	6.2	10	9	1.0	
P-14	600V 14mm ²	8.0	10.0	8.0	13	11	1.1	
P-22	600V 22mm ²	9.5	12.0	9.5	15	14	1.2	
P-38	600V 38mm ²	11.8	14.0	11.8	17	16	1.5	
P-60	600V 60mm ²	13.5	16.8	13.5	20	19	1.5	
P-80	600V 80mm ²	16.0	19.0	16.0	25	21.0	1.6	
P-100	600V 100mm ²	18.0	22.0	18.0	30	24.0	1.7	50pcs
P-125	600V 125mm ²	20.0	24.0	20.0	32	25.0	1.8	
P-150	600V 150mm ²	22.0	24.4	22.0	34	31.0	1.8	
P-200	600V 200mm ²	28.0	32.0	24.0	35	30.0	2.0	
P-250	600V 250mm ²	32.0	36.0	25.0	40	35.5	2.0	
P-325	600V 325mm ²	34.3	38.0	28.5	40	36.5	2.0	
P-400	600V 400mm ²	43.0	44.0	37.0	45.0	40.0	2.5	
P-500	600V 500mm ²	45.0	50.0	40.5	41.8	45.5	2.5	
P-630	600V 630mm ²	52.0	52.0	45.0	46.0	45.0	2.5	

